

Configurable Safety Control Unit

CZSR8901-2A



Performance Level: PL e
Category: Cat.4




Read this instruction sheet to make sure of correct operation.
Make sure that the instruction sheet is kept by the end user.

⚠ CAUTION

- Please check whether the product type on the package accords to the ordering contract;
- Read this manual carefully before installation or using. If anything unclear, please dial technical support hot-line:400 881 0780;
- Safety relay should be located in IP54 control cabinet;
- Supply voltage is 24V DC, 220V AC is forbidden;
- Users are not allowed to dismantle or repair the product, otherwise it will induce malfunction.


■ Connections

1. The module adopts knock-down connector with screw terminals.
2. The minimum cross section area of the flexible copper wire on the input side should be 0.5mm², and 1mm² on the output side.
3. A length of 8mm bared wire is locked by the M3.
4. Sufficient fuse protection must be provided to the output contacts.
5. The copper wire must tolerate ambient temperature at least 75°C.
6. Wrong use of the terminal screws may cause malfunction, heat, etc., so please tighten the screws with the torque of 0.5Nm.

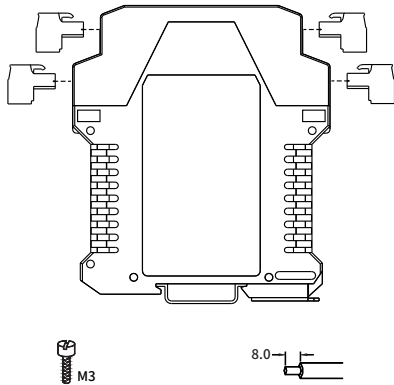

■ Disassembly

1. Insert a screwdriver (its edge length ≤ 6mm) into the downside metal lock of the device;
2. Push the screwdriver upwards, then prize the metal lock downwards;
3. Take the device out of the guide rail.

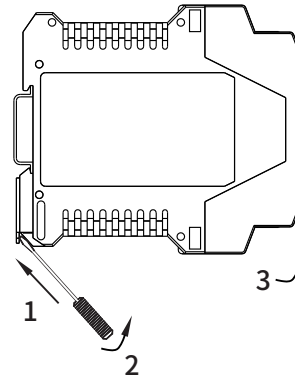


■ Installation

The safety relay should be installed in a housing at least IP54 (IEC 60529) degree of protection, and the installation and using should fulfill the related requirements of IEC 60204-1. CZSR8000 series safety relays are designed for mounting on 35mm DIN guide rail.

Installation according to the following steps:

1. Make the upside of the device locked into the guide rail;
2. Push the downside of the device in the rail.

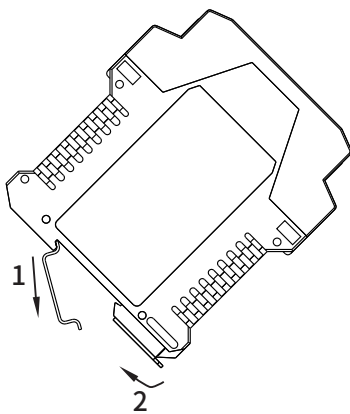

■ Maintenance

1. Please check the safety function of safety relay periodically, make sure the safety function executes properly, and there is no sign of any components or circuit changed or bypassed.
2. Please observe relevant safety regulations, and operate according to this user manual. Disregarding these safety regulations may cause fatal accident, serious personal injury or property loss.
3. Every product has been test strictly before leaving factory. If users find any abnormality in the module, please contact the nearest agent or our technic support hot-line.
4. In 5 years from the delivery date, if the product works improperly during normal operation, we will repair or replace it without payment.

SHANGHAI CHENZHU INSTRUMENT CO.,LTD.



Add : Building 6, 201 Minyi Road, Caohejing Hi-Tech Park
Songjiang New Industrial Park, Shanghai 201612, P.R. China
Tel : +86-21-64513350 Fax : +86-21-64846984
Email : chenzhu@chenzhu-inst.com
<http://www.chenzhu-inst.com>

Summarize

CZSR8901-2A is a configurable safety control unit, suitable for the application of multi switch-type safety devices (e.g. E-Stop buttons, safety gates, two-hand buttons and etc.). It can support Max. 3 safety devices input and 2 relay contacts output (N/O). It can be configured with different control logics to meet various field applications.

Specification

POWER

- Supply voltage: 24V DC
- Voltage range: 20 ~ 30V DC
- Current consumption: $\leq 100\text{mA}$ (24V DC)

INPUT

- Input current: $\leq 10\text{mA}$ (24V DC)
- Cable resistance: $\leq 15\Omega$
- Input devices: E-Stop buttons, safety gates, light beams, safety mats, two-hand control buttons, magnetic switches

Input channel: 3

OUTPUT

- Number of contacts: 2NO
- Contact material: AgSnO₂
- External contact fuse protection: 10A fast, 6A slow
- Contact loading: 5A/230V AC; 5A/24V DC

TIMES

- Switch-on delay: $\leq 100\text{ms}$
- Delay-on de-energisation: $\leq 30\text{ms}$
- Recovery time:
 - Trigger operation: $\leq 30\text{ms}$
 - Power failure: $\leq 1000\text{ms}$
- Supply interruption before de-energisation: 20ms

Safety

PL: PL e	in accordance with ISO 13849
Cat.: Cat. 4	in accordance with ISO 13849
T _M : 20 years	in accordance with ISO 13849
DC/DC _{avg} : 99%	in accordance with ISO 13849
SIL: SIL 3	in accordance with IEC 61508, IEC 62061
HFT: 1	in accordance with IEC 61508, IEC 62061
SFF: > 90%	in accordance with IEC 61508, IEC 62061
PFH _b : 1.78 E-9/h	in accordance with IEC 61508, IEC 62061
Stop category: 0/1	in accordance with EN 60204-1

B_{10d}:

U _e =24V DC:	
I _e	5A
Cycles	550,000
U _e =230V AC:	
I _e	5A
Cycles	550,000


Environmental Characteristics

- EMC: In accordance with EN60947, EN61000-6-2, EN61000-6-4
- Vibration frequency: 10Hz ~ 55Hz
- Vibration amplitude: 0.35mm
- Ambient temperature: -20°C ~ +60°C
- Storage temperature: -40°C ~ +85°C
- Relative humidity: 10% ~ 90%


Insulation Characteristic

- Clearance and creepage: In accordance with EN60947-1
- Overvoltage category: III
- Pollution degree: 2
- Protection type: IP20
- Elevation: $\leq 2000\text{m}$
- Rated insulation voltage: 250V AC
- Rated impulse voltage: 6000V (1.2/50 μs)
- Dielectric strength: 1500V AC, 1min


Block Diagram

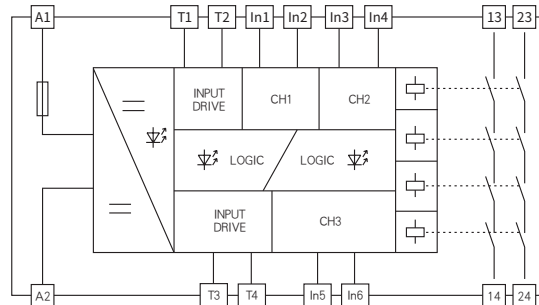

Typical Application

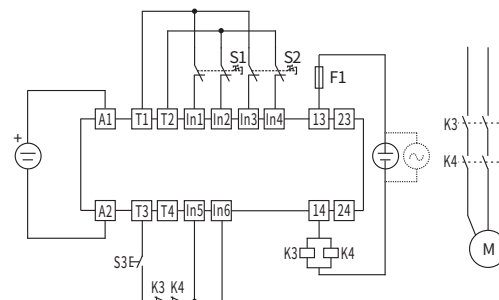

Wiring Diagrams

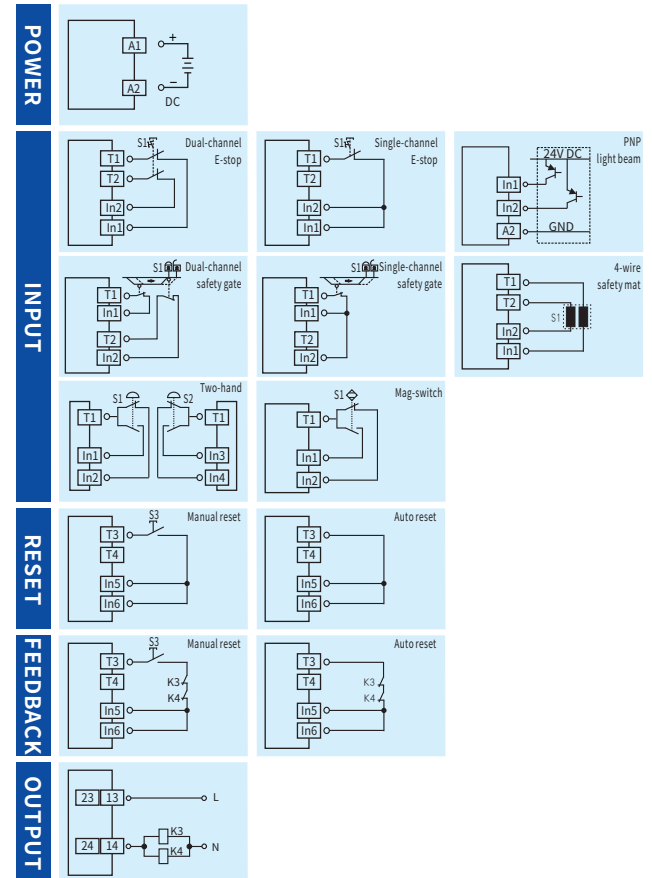

Dimensions

Dimensions(L×H×W): 114.5mm×99.0mm×22.5mm
Weight: 200g

