


Features

- 24V DC independent power supply
- Line fault detection(LFD)
- Configurable by software
- Integral CJC on terminals
- Power via DIN bus or terminal

	CZ3572 1/1	CZ3574 1/2	CZ3579.TC 2/2
Input			
Input Signal(Customized mV signal)	T、E、J、K、N、R、S、B	T、E、J、K、N、R、S、B	T、E、J、K、N、R、S、B
Internal CJC Temperature Range	-20°C~+60°C	-20°C~+60°C	-20°C~+60°C
CJC Precision	±1°C	±1°C	±1°C
Output			
Output Current/Load Resistance	0~20mA, 4~20mA / $R_L \leq 300\Omega$	0~20mA, 4~20mA / $R_L \leq 300\Omega$	0~20mA, 4~20mA / $R_L \leq 300\Omega$
Output Voltage/Load Resistance	0~5V, 1~5V / $R_L \geq 20k\Omega$	0~5V, 1~5V / $R_L \geq 20k\Omega$	0~5V, 1~5V / $R_L \geq 20k\Omega$
Fault Current of Overrange/Underrange	$I_L \approx 20.8mA / I_L \approx 3.8mA$	$I_L \approx 20.8mA / I_L \approx 3.8mA$	$I_L \approx 20.8mA / I_L \approx 3.8mA$
Fault Current of Line Break	$I \approx 20.8mA$	$I \approx 20.8mA$	$I \approx 20.8mA$
General Parameters			
Loop Supply Voltage(U_s)	20~35V DC	20~35V DC	20~35V DC
Power Reverse Protection	Support	Support	Support
Current Consumption(Supply voltage: 24V)	$\leq 35mA$	$\leq 55mA$	$\leq 55mA$
Conversion Accuracy	See P32 Table 3	See P32 Table 3	See P32 Table 3
Temperature Drift	0.01%F.S./°C	0.01%F.S./°C	0.01%F.S./°C
Response Time (0~90%)	$\leq 1s$	$\leq 1s$	$\leq 1s$
Dielectric Strength	1500V DC;1min	1500V DC;1min	1500V DC;1min
Insulation Resistance	$\geq 100M\Omega$; 500V DC	$\geq 100M\Omega$; 500V DC	$\geq 100M\Omega$; 500V DC
EMC Standards	GB/T 18268(IEC 61326-1)	GB/T 18268(IEC 61326-1)	GB/T 18268(IEC 61326-1)
Ambient Temperature	-20°C~+60°C	-20°C~+60°C	-20°C~+60°C
Suitable Field Apparatus	TC sensor and mV signal	TC sensor and mV signal	TC sensor and mV signal

Note: Fault current of line break <4mA or other special requirements, need to be customized.

Dimensions

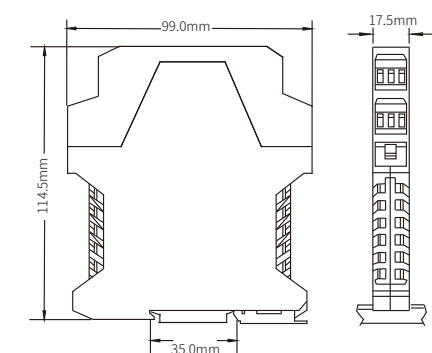

Connection

