

1/1: GS8523-EX

Digital output isolated barriers, control the 12V/45mA power supply to hazardous area. This product is suitable for driving IS devices such as solenoid valves, LED and some other low-power loads located in the hazardous area. The input and output are each galvanically isolated, and this product is loop powered.

Specification

Loop Supply Voltage(Ue): 20~35V DC


Current Consumption: ≤75mA(Supply voltage: 24V; output: 45mA)

Hazardous-area Output:


Open-circuit Voltage: 22V~24V

Output voltage at 45mA: ≥12V

Equivalent Output Circuit:



Output Characteristic:

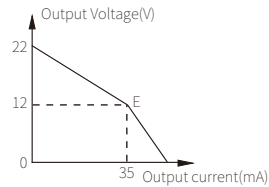

Response Time: ≤20ms

Power Supply Protection: Power supply reverse protection

EMC: According to IEC 61326-1(GB/T 18268), IEC 61326-3-1

Ambient Temperature: -20°C~+60°C

Dielectric Strength:

Between non-intrinsically safe part and intrinsically safe part ≥2500V AC

Insulation Resistance:

Between non-intrinsically safe part and intrinsically safe part ≥100MΩ

Structure: GS8500 range structure customized by Phoenix Contact.

Weight: Approx. 100g

Suitable Location: Mounting in safe area or zone2(for ec protection), and connected to the IS apparatus in hazardous area up to zone 0 IIC and zone 20 IIIC.

Suitable Field Apparatus: solenoid valves, LED.

SIL3
IEC61508




Dimensions: 118.9mm × 106.0mm × 12.5mm

Connection

Hazardous-area

Safe-area/Zone 2

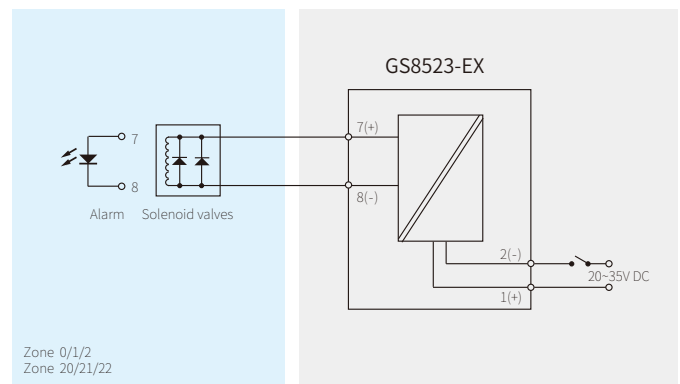

Explosion-proof Certificate

Certifying Authority: NEPSI(China)

Ex Marking: [Ex ia Ga] II C

[Ex iaD]

Ex nA IIC T4 Gc

Maximum Voltage: Um=250V

Intrinsic Safety Parameters(7、8 terminals):

U₀=25V, I₀=140mA, P₀=875mW

II C: C₀=0.11μF, L₀=1.5mH

*II B: C₀=0.84μF, L₀=4.5mH

II A: C₀=2.97μF, L₀=12.0mH

I: C₀=4.87μF, L₀=23mH

*II B Intrinsic Safety Parameters are also suitable for dust explosion protection[Ex iaD]