

2/2: GS8568-EX

Analog output isolated barrier transfer the 4~20mA signal from safe area to hazardous area to drive executive devices. It also allows bi-directional transmission of HART communication signals. The product needs an independent power supply and galvanic isolation among power supply, input and output.

Specification

Supply Voltage: 20~35V DC

Current Consumption: $\leq 80\text{mA}$ (Supply voltage: 24V; output: 20mA)

Safe-area Input:

Current: 0/4~20mA, HART digital signal

Voltage drop: $\leq 6\text{V}$

Hazardous-area Output:

Current: 0/4~20mA, HART digital signal

Load Resistance: $R_L \leq 800\Omega$

HART Communication Load Resistance: $R_L \geq 250\Omega$

Output Accuracy: 0.1%F.S.(Typical: 0.05%F.S.)

Temperature Drift: 0.005%F.S./ $^{\circ}\text{C}$

Response Time(0~90%): $\leq 2\text{ms}$

Power Supply Protection: Power supply reverse protection

EMC: According to IEC 61326-1(GB/T 18268), IEC 61326-3-1

Ambient Temperature: $-20^{\circ}\text{C} \sim +60^{\circ}\text{C}$

Dielectric Strength:

Between non-intrinsically safe part and intrinsically safe part $\geq 2500\text{V AC}$

Between power supply part and input part $\geq 500\text{V AC}$

Insulation Resistance:

Between non-intrinsically safe part and intrinsically safe part $\geq 100\text{M}\Omega$

Between power supply part and input part $\geq 100\text{M}\Omega$

Structure: GS8500 range structure customized by Phoenix Contact.

Weight: Approx. 135g

Suitable Location: Mounting in safe area, and connected to the IS apparatus in hazardous area up to zone0 IIC and zone20 IIIC.


Suitable Field Apparatus: 2-wire valve positioner, electrical converter, etc.

SIL2
IEC61508



Dimensions: 118.9mm × 106.0mm × 17.5mm

Connection

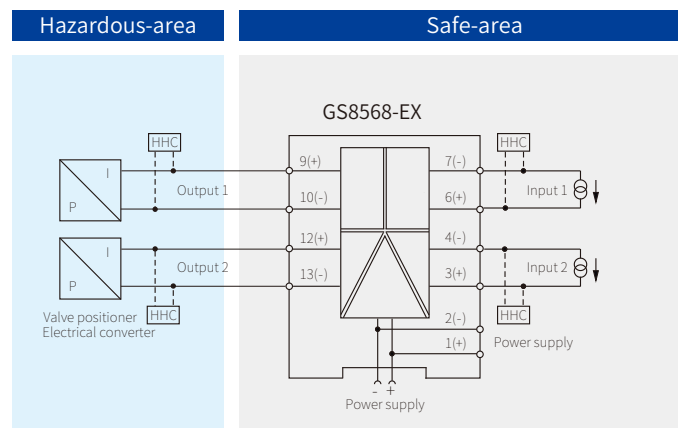

Note: a) Can't use HHC (HART Hand Held Communicator) in hazardous area and safe area at the same time;

b) HHC(HART Hand Held Communicator)used in the hazardous area must get the explosion-proof certificate.

c) Bus-powered function is optional, if necessary please specified when ordering, and purchase bus power supply accessories in additional.

Explosion-proof Certificate

Certifying Authority: NEPSI(China)

Ex Marking: [Ex ia Ga] II C

[Ex iaD]

Maximum Voltage: $U_m=250\text{V}$

Intrinsic Safety Parameters(9、10; 12、13 terminals):

$U_o=28\text{V}$, $I_o=93\text{mA}$, $P_o=651\text{mW}$

II C: $C_o=0.083\mu\text{F}$, $L_o=4.2\text{mH}$

*II B: $C_o=0.65\mu\text{F}$, $L_o=12.6\text{mH}$

II A: $C_o=2.15\mu\text{F}$, $L_o=33.6\text{mH}$

*II B Intrinsic Safety Parameters are also suitable for dust explosion protection[Ex iaD]