

E-Stop Buttons, Safety Gates Input Safety Relay

Features

Single or dual channel
Manual or automatic reset
Short circuit monitoring

CZSR8001-3A1B

CZSR8001-3A1B(M)

Power data

Supply voltage	24V DC/AC	24V DC/AC
Voltage tolerance	0.85~1.1	0.85~1.1
Current consumption	≤90mA (24V DC) / ≤240mA (24V AC)	≤90mA (24V DC) / ≤240mA (24V AC)

Input data

Input current	≤50mA (24V DC)	≤50mA (24V DC)
Cable resistance	≤15Ω	≤15Ω
Input devices	E-stop buttons, Safety gates	E-stop buttons, Safety gates

Output data

Number of contacts	3NO+1NC	3NO+1NC
Contact material	AgSnO ₂ + 0.2 μm Au	AgSnO ₂ + 0.2 μm Au
External contact fuse protection	10A gL/gG NEOZED (NO); 6A gL/gG NEOZED (NC)	10A gL/gG NEOZED (NO); 6A gL/gG NEOZED (NC)
Mechanical endurance of contacts	10 ⁷ 次以上	10 ⁷ 次以上
Utilisation category	In accordance with EN60947-5-1: AC-15, 5A/230V; DC-13, 5A/24V	In accordance with EN60947-5-1: AC-15, 5A/230V; DC-13, 5A/24V

Time data

Switch-on delay	≤300ms	≤150ms
Delay-on de-energisation	≤30ms	≤30ms
Recovery time	≤100ms	≤100ms
Supply short interruption	20ms	20ms

Environmental data

EMC	EN60947, EN61000-6-2, EN61000-6-4	EN60947, EN61000-6-2, EN61000-6-4
Vibration	Vibration frequency: 10Hz~55Hz; Vibration amplitude: 0.35mm	Vibration frequency: 10Hz~55Hz; Vibration amplitude: 0.35mm
Ambient temperature	-20°C~+60°C	-20°C~+60°C
Storage temperature	-40°C~+85°C	-40°C~+85°C
Relative humidity	10%~90%	10%~90%
Elevation	≤2000m	≤2000m

Insulation data

Oversupply category	III	III
Pollution degree	2	2
Rated insulation voltage	250V AC	250V AC
Rated impulse voltage	6000V (1.2/50us)	6000V (1.2/50us)
Dielectric strength	1500V AC, 1min	1500V AC, 1min
Clearance and creepage distance	In accordance with EN 60947-1	In accordance with EN 60947-1

Certification

Safety integrity level	SIL3	SIL3
Performance level	PLe	PLe
Category	Cat.4	Cat.4

Products show

114.5mm×99.0mm×22.5mm




SIL3
IEC61508

PLe
Cat.4


EN/ISO13849

CE

Block diagram

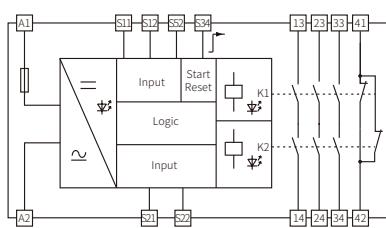

CZSR8001-3A1B

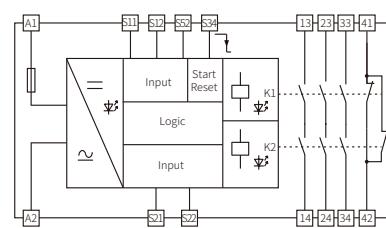

CZSR8001-3A1B(M)