

## Features

- 2-wire safety mats/edges
- Automatic reset
- Monitored manual reset

### CZSR8302-3A1B

### CZSR8303-3A1B


Power data		
Supply voltage	24V DC/AC	<b>100V~230V AC</b>
Voltage tolerance	0.85~1.1	-
Current consumption	≤95mA (24V DC) / ≤240mA (24V AC)	≤7 VA (220V AC)
Input data		
Input current	≤10mA (24V DC)	≤10mA (220V AC)
Cable resistance	≤15Ω	≤15Ω
Input devices	Safety mats, safety edges (2-wire)	Safety mats, safety edges (2 or 4-wire)
Terminal resistance	1.0KΩ ~ 10KΩ	1.0KΩ ~ 10KΩ
Output data		
Number of contacts	<b>3NO+1NC</b>	<b>3NO+1NC</b>
Contact material	AgSnO <sub>2</sub> + 0.2 μm Au	AgSnO <sub>2</sub> + 0.2 μm Au
External contact fuse protection	10A gL/gG NEOZED (NO); 6A gL/gG NEOZED (NC)	10A gL/gG NEOZED (NO); 6A gL/gG NEOZED (NC)
Mechanical endurance of contacts	10 <sup>7</sup> 次以上	10 <sup>7</sup> 次以上
Utilisation category	In accordance with EN60947-5-1: AC-15, 5A/230V; DC-13, 5A/24V	In accordance with EN60947-5-1: AC-15, 5A/230V; DC-13, 5A/24V
Time data		
Switch-on delay	≤300ms	≤300ms
Delay-on de-energisation	≤30ms	≤30ms
Recovery time	≤100ms	≤500ms
Supply short interruption	20ms	20ms
Environmental data		
EMC	EN60947, EN61000-6-2, EN61000-6-4	EN60947, EN61000-6-2, EN61000-6-4
Vibration	Vibration frequency: 10Hz~55Hz; Vibration amplitude: 0.35mm	Vibration frequency: 10Hz~55Hz; Vibration amplitude: 0.35mm
Ambient temperature	-20°C~+60°C	-20°C~+60°C
Storage temperature	-40°C~+85°C	-40°C~+85°C
Relative humidity	10%~90%	10%~90%
Elevation	≤2000m	≤2000m
Insulation data		
Overvoltage category	III	III
Pollution degree	2	2
Rated insulation voltage	250V AC	250V AC
Rated impulse voltage	6000V (1.2/50us)	6000V (1.2/50us)
Dielectric strength	1500V AC, 1min	1500V AC, 1min
Clearance and creepage distance	In accordance with EN 60947-1	In accordance with EN 60947-1
Certification		
Safety integrity level	SIL3	SIL3
Performance level	PLe	PLe
Category	Cat.4	Cat.4

## Products show


114.5mm × 99.0mm × 22.5mm



## Block diagram

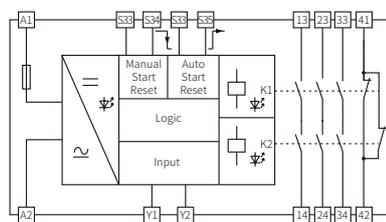

CZSR8302-3A1B

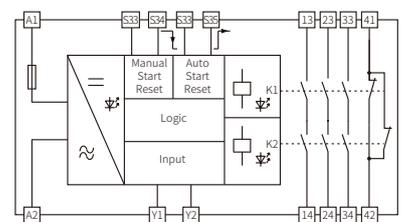

CZSR8303-3A1B